


CB005

Acrylic Latex Cove Base Adhesive

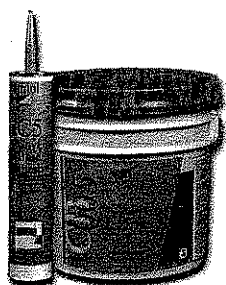

CB 005 Acrylic Latex Cove Base Adhesive is the perfect compliment for Capitol USA's line of vinyl and rubber wall base. CB 005's acrylic formulation provides a strong, firm setting bond for years of trouble-free performance.

- Strong Early Grab for Corner Wrapping
- White Formulation Means Easier Cleanup
- Strong, Impact Resistant Bond
- Resists Shrinkage

Description: Acrylic Latex Based Cove Base Adhesive

Flammability: Non flammable

Open Time: 0 minute

Working Time: 45 minute

Shelf Life: One year in closed container.

Limitations: Do not subject to temperatures below 10°F. If frozen, warm to at least 70°F for 24 hours and stir before using. For interior use only.


Packaging: 4 Gallon • 1 Gallon (4/case) • 1 Quart (12/case) • 30-Ounce Cartridge (12 /case)

For The Installation Of:

- Vinyl Cove Base • Rubber Cove Base • Wall Carpet

For Use Over:

- Gypsum Drywall • Dry Concrete • Plaster • Wood • Plywood • Brick • Scarified for wall carpet only (sanded) Plastic Laminates

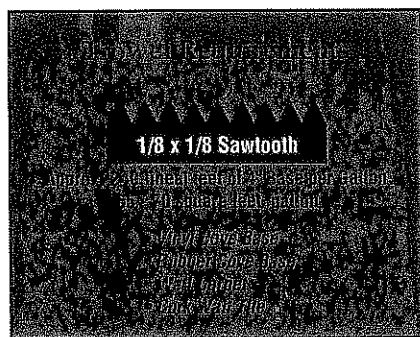


Instructions For Use:

1. Condition room and materials at 65°F for 48 hours prior to, during and after installation. Avoid hot and sunny conditions.
2. Make sure wall is free from grease, oil, paint, or old alcohol-resin adhesives that might interfere with the bond of the adhesive.
3. Spread adhesive with the correct trowel making sure to maintain trowel notchings throughout the installation.
4. Set cove base on to wall immediately. Press cove base to wall using a roller to insure proper adhesive transfer.
5. Clean wet adhesive and tools with white cloth and soap and water. Dried adhesives with mineral spirits.

Note: If applying adhesive with a cartridge gun, use a 2-hole nozzle for 2-1/2" base, a 3-hole nozzle for 4" base, and a 5-hole nozzle for 6" base. Apply adhesive at least 1/4" from top of base if using a trowel and 1" from top of base if using a cartridge so that adhesive does not seep out as base is rolled. Bond base within 20 minutes of adhesive application.

CAUTION: Avoid contact with skin and eyes. If splashed in eyes, flush with copious amounts of water for 15 minutes and call physician. Wash skin thoroughly with soap and water. Use with positive fresh air cross-ventilation. Do not take internally. If swallowed do not induce vomiting, call physician immediately. Keep container closed. **KEEP OUT OF REACH OF CHILDREN.**



Capitol USA, LLC
300 Cross Plains Blvd. • PO Box 2023
Dalton, GA 30722
800-831-8381 • Fax: 706-277-5753
Jim Walker ProSeries TechLine 888-234-8400
Website www.capitolusa.com

CB005

Acrylic Latex Cove Base Adhesive

SECTION I - PRODUCT IDENTIFICATION

Manufacturer's Name: Capitol USA, LLC
Address: 300 Cross Plains Blvd.
Dalton, GA 30720
Telephone #: 1-800-831-8381
Emergency Phone: 800-535-5053
Generic ID: Latex based cove base adhesive
DOT Hazard Classification: None
Product Identity: CB 005 Acrylic Latex Cove Base Adhesive

SECTION II - HAZARDOUS COMPONENTS

None per OSHA Regulation: 29CFR1910.1200.
None per SARA Title III, Section 313 and TSCA 40 CFR 372

SECTION III - PHYSICAL DATA

Initial Boiling Point: 212°F. Vapor Pressure: Same as water. Vapor Density (Air=1.0): Same as water. Specific Gravity: 1.37. G/L VOC (calculated): 0.00

SECTION IV - FIRE AND EXPLOSION DATA

Flash Point: NA. Explosive Limit (Product): NA. Extinguishing Media: NA. Hazardous Decomposition Products: None. Special Fire Fighting Procedures: None. Unusual Fire & Explosion Hazards: None

SECTION V - HEALTH HAZARD DATA

Permissible Exposure Level: NA. Threshold Limit Value: NA. EFFECTS OF EXPOSURE: Eyes - Possible mild irritation. Skin - None known. Breathing- None known. FIRST AID: Skin - Soap and water. Eyes- Flush with water, lifting upper and lower lids occasionally. Ingestion - Do not induce vomiting. Call physician or transport to an emergency facility. Inhalation- If affected, remove individual to fresh air. Use only in well ventilated areas.

SECTION VI - REACTIVITY DATA

Stability: Stable. Incompatibility: None. Hazardous Decomposition: None. Hazardous Polymerization: None. Conditions To Avoid: None Known

SECTION VII - SPILL OR LEAK PROCEDURES

Steps to be Taken in Case Material is Released or Spilled: Absorb liquid on paper, vermiculite, floor absorbent, or other absorbent material. Solidified materials accepted for landfill disposal in most locations. Check all local, state, and federal regulations.

SECTION VIII - PROTECTIVE EQUIPMENT

Ventilation: Open all available windows and entrances to insure good ventilation. Respirator Protection: None needed. Protective Gloves: None needed. Eye Protection: Wear glasses or protective goggles to avoid splashes. Other Protective Equipment: None required. Wash Hands Thoroughly with Soap and Water.

SECTION IX - SPECIAL PRECAUTIONS

Protect from freezing. Use only in applications as stated on the label. Do not take internally. Close container after each use. Avoid skin and eye contact.

Ventilation with fresh air, including open doors and windows should be observed during any flooring installation. Operate HVAC systems at 100% fresh air intake before, during and after installation to eliminate lingering odors or particulate matter. KEEP OUT OF REACH OF CHILDREN

Capitol USA believes the data set forth herein is accurate as of the date hereof, and makes no warranty with respect thereto and expressly disclaims all liability for reliance thereon. Such data are offered solely for your consideration, investigation and verification.



Capitol USA, LLC
300 Cross Plains Blvd. • PO Box 2023
Dalton, GA 30722
800-831-8381 • Fax: 706-277-5753
Jim Walker ProSeries TechLine 888-234-8400
Website www.capitolusa.com